


IASO®

Better Outside

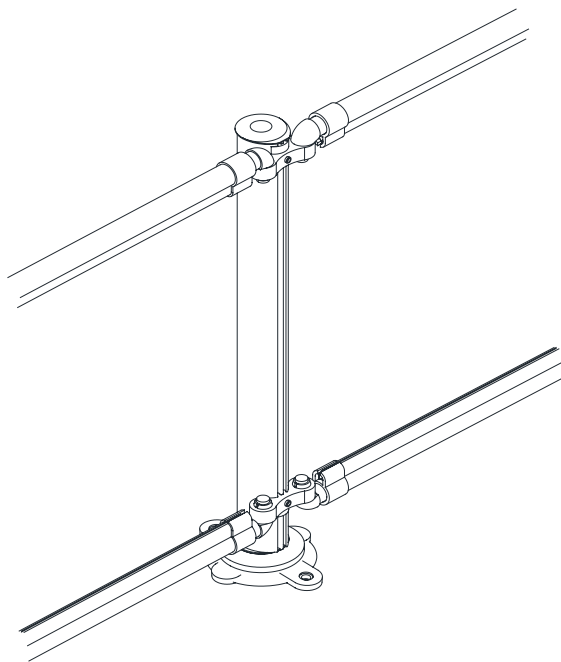

INSTALLATION MANUAL

FLASH-N FENCE

piscinas@iasoglobal.com
+34 973 27 30 24
iasoglobal.com

040-246: POST CAP

040-250: CROSSBEAM PROTECTOR

160-213: CROSSBEAM 1.16


160-214: CROSSBEAM 1.41

699-383: CROSSBEAM SUPPOT

180-678: SCREW 2.2 x 6.50

4040-245: ROD Ø4

160-221: POST

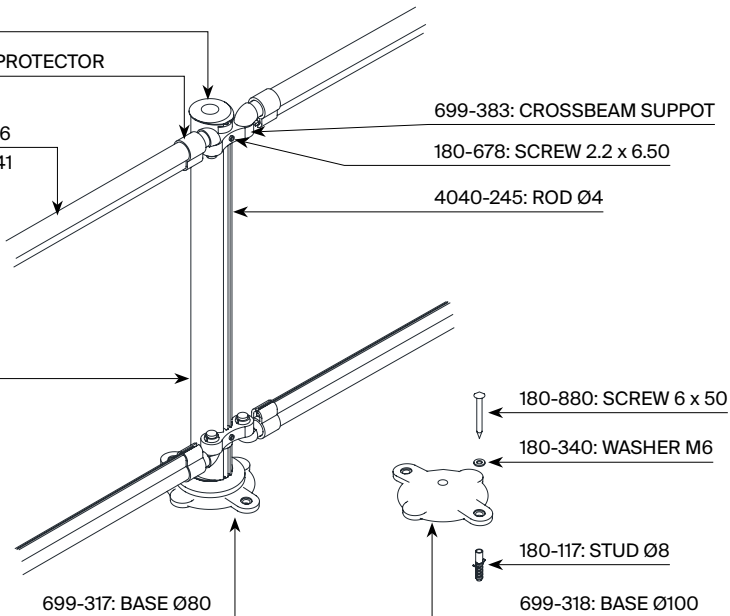


040-242: HINGE

160-226: DOOR PROFILE 0.56

040-247: DOOR STOPPER

160-225: DOOR PROFILE 1.20

040-241: MAGNETIC CLOSURE

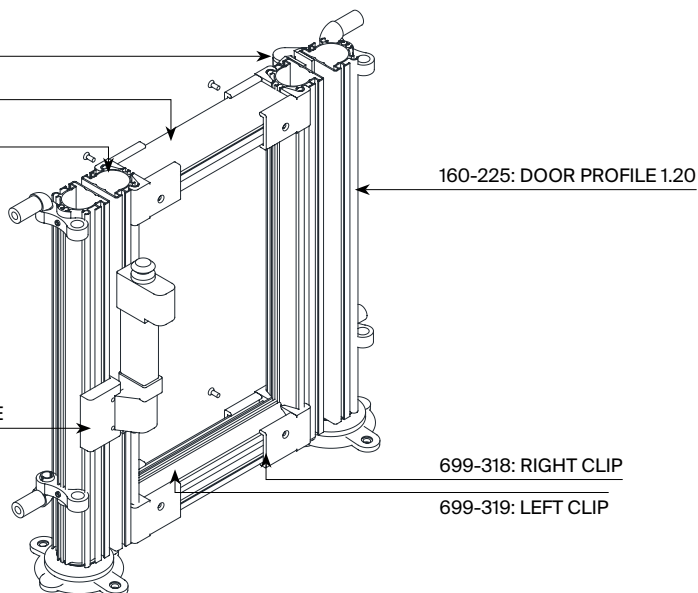


RECOMMENDATIONS

- Install the safety fence at least one meter away from the water.
- Do not install the fence too far from the pool to maintain the fence's efficiency.
- Avoid the presence of any fixed support point (wall,...) or mobile support point (tricycle,...) on either side of the fence within a radius of 1.10 m.
- The floor must be prepared with a concrete base at least 7 cm thick.
- Recommended concrete of 250 N/mm².

POST FIXATION

The fence modules come partially assembled.

Fix the first post to the ground by marking through the holes in the base.



The holes should be made with an Ø8 mm drill bit and about 55 mm deep.

Insert the plastic plug into the hole.


Fix the base with 2 screws.



Once the first post is anchored to the ground.


Slide the green/black crossbars along the edge of the mesh, both at the top and bottom.

Insert the crossbars into the plastic funnel of each post.

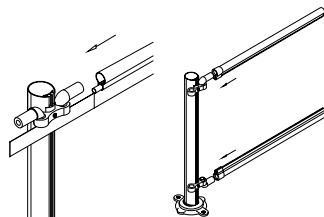


Place the second post, marking through the holes in the base (as was done with the first one).

Assemble and successively secure all the posts.




UNION OF THE MODULES

To join two modules, you need to slide the rod at the end of one section into the slot that remains free on the first post of the next section.

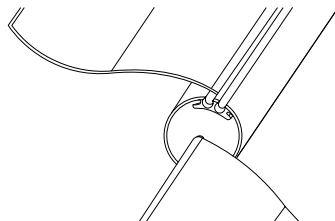

FENCE TENSIONING

To keep the mesh well tensioned, first slide the plastic funnel from the top down to the end of the post, up to the cap, and secure it with the screw. Repeat the same operation with the bottom piece.

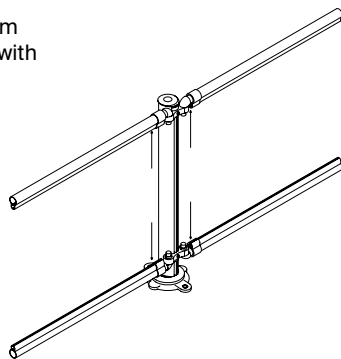


POSTS ALIGNMENT

Once the fence is assembled, use the socket wrench to loosen the base from inside the post, align the first and last posts, and tighten the base. With the help of a string, align the other posts.



DOOR MODULE

The door comes partially assembled; complete the assembly as indicated below:

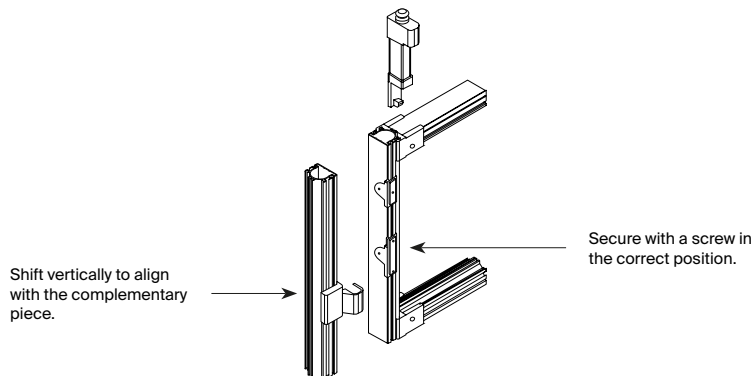


Insert the black plastic rod through the 2 bags along the door frame.


Next, slide the vertical profiles.

Assemble the door frame with the aluminium pieces.


Fix the horizontal profiles with the vertical ones, first at the bottom and then at the top.



The locking system has all possible adjustments.




Removing the hinge cap allows you to adjust the return tension.

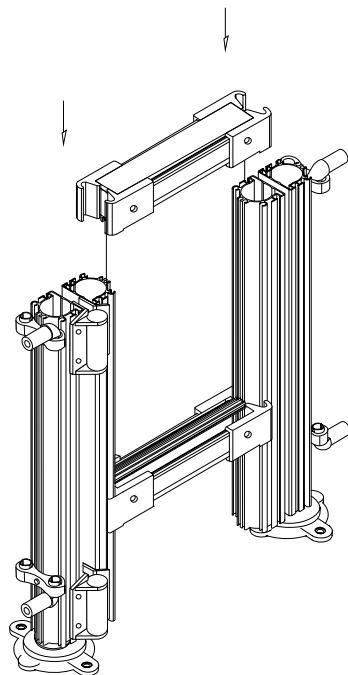

HOW TO ADD A POST


There is the option to adjust the fence to the required size, or to insert a post in a specific position to create a corner and make a turn.

Make a fold in the mesh at the point where you want to place the post.

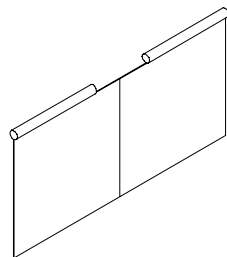




Make a neckline similar to the other posts, carefully trimming the macaroni from the top and bottom edges.

Cut the crossbeams with a saw to the appropriate length between posts.

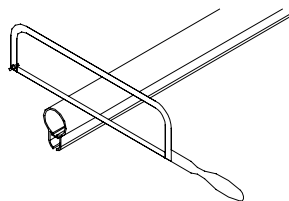

HOW TO SHORTEN A MODULE

Proceed as indicated in the drawings:

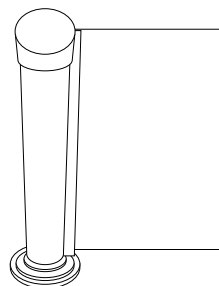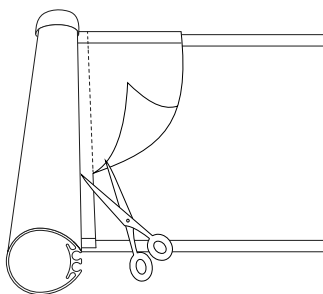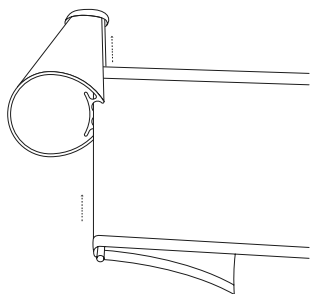


MAINTENANCE AND CARE

- It is recommended to periodically check the proper functioning of the locking system to avoid a failure.
- It is imperative to replace any damaged element or set of elements as quickly as possible. Use only original parts from the supplier/installer.

Cleaning: A solution of neutral detergent and water can be used. For this, always clean and dry with a soft cloth, applying very little pressure.

SAFETY TIPS

- The pool can pose a serious danger to your children. A drowning can happen very quickly. Children near a pool require constant and active supervision, even if they know how to swim.
- This fence does not replace common sense or individual responsibility. The purpose of the fence is not to replace the supervision of responsible adults, who retain the essential responsibility for protecting young children.
- The means of access must be systematically closed in case of absence from the home, even if it is momentary.
- Take all possible measures to prevent children from accessing the pool in case of fence or access point repair or fence dismantling.
- The presence of one of the parents and/or a responsible adult is essential as soon as the pool is open.



Security is only ensured with the closed access method.



Check for the absence of any object near the fence that could incite or facilitate climbing the fence.

The closure of the access point by automatic locking systems must be periodically verified.

Memorise and keep near the pool the first aid numbers:

Emergencies: 112 for Spain / Toxicological Emergencies: 91 562 04 20

iasoglobal.com